
boyd

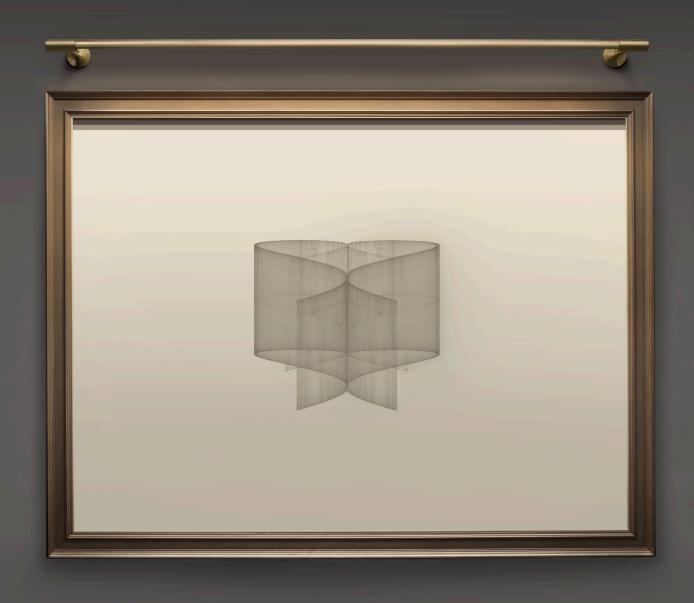

AURORA ART LIGHT

24"/30"/36"/42"/48"/54"/60"

MODELS 10824, 10825, 10826, 10827, 10828, 10829, 10830

Engineered with precision in mind, the Aurora Art Light is designed to bring out the best in surfaces and art. Redefining art illumination with cutting-edge technology and thoughtful design. Featuring museum quality LEDs, industry-leading, custom 98+ CRI, No UV for the preservation of light-sensitive works, A dual-lens design that casts a focused, soft light enhances visual depth. The light bar's 65-degree rotation lets you direct the throw of light exactly where you want it.

Available in seven standard lengths and custom lengths upon request.

MATERIAL

Architectural Bronze

Earthen Bronze, Antiqued Bronze, Blackened Bronze, Satin Bronze, Satin Nickel

LAMPING/ DIMENSIONS

10824 LED

12 total watts, Standard 3000K/98+ CRI ~1300 Fixture Lumens Universal 120-277V. H 1" x L 24" x Projection 9" 7 lbs (25mm x 610mm x 229mm) 3.2 kg

10825 LED

15 total watts, Standard 3000K/98+ CRI ~1600 Fixture Lumens Universal 120-277V. H 1" x L 30" x Projection 9" 8 lbs (25mm x 762mm x 229mm) 3.6 kg

10826 LED

19 total watts, Standard 3000K/98+ CRI ~2000 Fixture Lumens Universal 120-277V. H 1" x L 36" x Projection 9" 9 lbs (25mm x 914mm x 229mm) 4 kg

10827 LED

24 total watts, Standard 3000K/98+ CRI ~2550 Fixture Lumens Universal 120-277V. 10 lbs H 2" x L 42" x Projection 9" (25mm x 1067mm x 229mm) 4.5 kg

10828 LED

27 total watts, Standard 3000K/98+ CRI ~2900 Fixture Lumens Universal 120-277V. H 1" x L 48" x Projection 9" 11 lbs (25mm x 1219mm x 229mm) 5kg

10829 LED

32 total watts, Standard 3000K/98+ CRI ~3400 Fixture Lumens Universal 120-277V. H 1" x L 54" x Projection 9" 12lbs (25mm x 1371mm x 229mm) 5.5kg

10830 LED

36 total watts, Standard 3000K/98+ CRI ~3800 Fixture Lumens Universal 120-277V. H 1" x L 60" x Projection 9" 13lbs (25mm x 1524mm x 229mm) 5.9kg

NOTES

- UL listed (or equivalent) for damp locations.
- Backplates: 2"ø x 3/8" (51 x 10mm) or a 7/8"ø trim plate on premium mud style.
- · Wire Exit Location: left end or right end.
- · The lamps standard in this fixture can be dimmed with ELV or MLV style dimmers
- Driver must be mounted remotely.
- End Cap Style: Knurled or Smooth.







(h)