

B O Y D




ELEMENTS: WIND
LED IN-WALL

#10676

SHOWN IN SATIN NICKEL REFLECTOR

**10676 Elements: Wind
LED In-Wall 3'**

Height	Width	Projection	Net.
36 ⁵ / ₈ "	5 ⁵ / ₈ "	1 ¹ / ₈ "	16 lbs
930 mm	143 mm	3 mm	7.3 kg

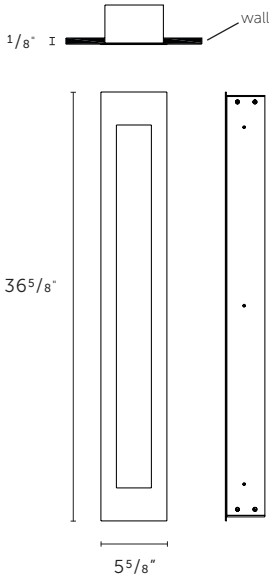

Backbox: 5" H x 36" W x 3¹/₄" D;
127 mm x 914 mm x 83 mm

Center of outlet box to top of fixture:
18¹/₄"; 464 mm

Reflector: brass plate

Backbox: unfinished aluminum

Outer Frame: available in White Primer
for painting (standard), or Blackened Steel
(upcharge)

Horizontal or vertical mounting

This fixture requires recessed mounting. See
full installation instructions for mounting
details.

ADA compliant at all mounting heights

UL listed (or equivalent) for damp locations

Optional Cover Lens: clear acrylic (upcharge)

REQUIRED INFORMATION

- Length: 36" nominal or 48" nominal



LAMPING

LED

- 2700°K / 90+ CRI
- 40 total watts
- Lamp included with fixture

Fixture can be dimmed using 0-10v low-voltage
dimming controls and wiring

**STANDARD
FINISHES**

Outer Frame
• White Primer

**Inner Reflector
Panel**

- Satin Brass
- Antiqued Boyd
Brass
- Gossamer Gold

**SPECIALTY
FINISHES**

**Inner Reflector
Panel**

- Satin Nickel


OPTIONAL

Outer Frame
• Blackened

Cover Lens
• clear acrylic

**10676 Elements: Wind
LED In-Wall 4'**

Height	Width	Projection	Net Wt.
48 ⁵ / ₈ "	5 ⁵ / ₈ "	1 ¹ / ₈ "	21 lbs
1235 mm	143 mm	3 mm	9.5 kg

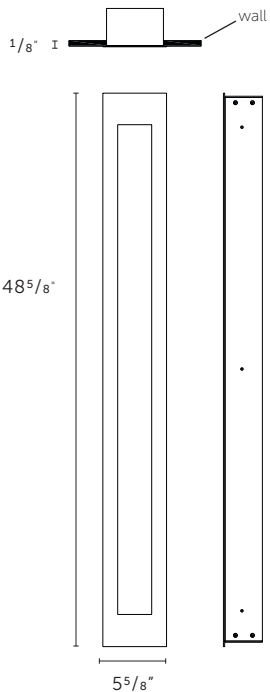

Backbox: 5" H x 48" W x 3¹/₄" D;
127 mm x 1219 mm x 83 mm

Center of outlet box to top of fixture:
24¹/₄"; 616 mm

Reflector: brass plate

Backbox: unfinished aluminum

Outer Frame: available in White Primer
for painting (standard), or Blackened Steel
(upcharge)

Horizontal or vertical mounting

This fixture requires recessed mounting. See
full installation instructions for mounting
details.

ADA compliant at all mounting heights

UL listed (or equivalent) for damp locations

Optional Cover Lens: clear acrylic (upcharge)

REQUIRED INFORMATION

- Length: 36" nominal or 48" nominal



LAMPING

LED

- 2700°K / 90+ CRI
- 56 total watts
- Lamp included with fixture

Fixture can be dimmed using 0-10v low-voltage
dimming controls and wiring

**STANDARD
FINISHES**

Outer Frame
• White Primer

**Inner Reflector
Panel**

- Satin Brass
- Antiqued Boyd
Brass
- Gossamer Gold

**SPECIALTY
FINISHES**

**Inner Reflector
Panel**

- Satin Nickel

OPTIONAL

Outer Frame
• Blackened

Cover Lens
• clear acrylic