

ELEMENTS: WATER LED IN-WALL

# 365/8° wall

10675 Elements: Water

LED In-Wall 3'

Height	Width	Projection	Net Wt.
365/8"	55/8"	1/8"	16 lbs
930 mm	143 mm	3 mm	7.3 kg

Backbox: 5" H x 36" W x  $3^{1}/4$ " D; 127 mm x 914 mm x 83 mm

Center of outlet box to top of fixture:

18<sup>1</sup>/<sub>4</sub>"; 464 mm

Reflector: Mirrored panel with clear halfspheres

Cover Lens: Two-way mirror

Combination of mirrored panel and twoway mirrored cover lens creates an infinity reflection

rencenon

Backbox: unfinished aluminum

Outer Frame: available in White Primer for painting (standard), or Blackened Steel (upcharge)

Horizontal or vertical mounting

This fixture requires recessed mounting. See full installation instructions for mounting details.

ADA compliant at all mounting heights

UL listed (or equivalent) for damp locations

### REQUIRED INFORMATION

• Length: 36" nominal or 48" nominal



### LAMPING

### LED

- 2700 K / 90+ CRI
- 40 total watts
- · Lamp included with fixture

Fixture can be dimmed using 0-10v low-voltage dimming controls and wiring

### STANDARD FINISHES

**Outer Frame** 

White Primer


### OPTIONAL

### **Outer Frame**

• Blackened

### 10675 Elements: Water LED In-Wall 4'

55/8"

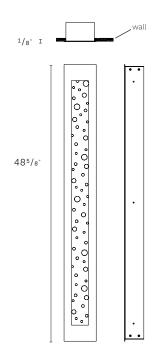

55/8"

# Height Width Projection Net Wt. 485/8" 55/8" 1/8" 21 lbs 1235 mm 143 mm 3 mm 9.5 kg

Backbox: 5" H x 48" W x 3<sup>1</sup>/<sub>4</sub>" D; 127 mm x 1219 mm x 83 mm

Center of outlet box to top of fixture: 241/4"; 616 mm

Reflector: Mirrored panel with clear halfspheres

Cover Lens: Two-way mirror

Combination of mirrored panel and twoway mirrored cover lens creates an infinity reflection

Backbox: unfinished aluminum

Outer Frame: available in White Primer for painting (standard), or Blackened Steel (upcharge)

Horizontal or vertical mounting

This fixture requires recessed mounting. See full installation instructions for mounting details.

ADA compliant at all mounting heights

UL listed (or equivalent) for damp locations

### REQUIRED INFORMATION

· Length: 36" nominal or 48" nominal



### LAMPING

### LED

- 2700 °K / 90+ CRI
- 56 total watts
- Lamp included with fixture

Fixture can be dimmed using 0-10v low-voltage dimming controls and wiring

### STANDARD FINISHES

Outer Frame

• White Primer

## OPTIONAL

Outer Frame

Blackened